ARIAN KELID
آرین کلید پارس

دیژنکتور خلاء

مشخصات عمومی

- دیژنکتور خلاءِ جهت نصب در تابلوهای فشار متوسط به صورت ثابت و کشویی
- قابلیت شارژ دستی تا ۱۰۰۰۰ مرتبه
- قابلیت مشاهده شارژ یا دشارژ بودن دژنگتور
- مجهز به شمارنده تعداد قطع و وصل
- دارای تایپ تست CESI ایتالیا، SIEMENS-SVEPPI ایتالیا و پژوهشگاه نیرو در ایران
- استفاده از تکنولوژی Embedded جهت پلهای کلید به منظور حفاظت بیشتر
- مجهز به موتور جهت اتوماسیون

Vaccum Circuit Breaker

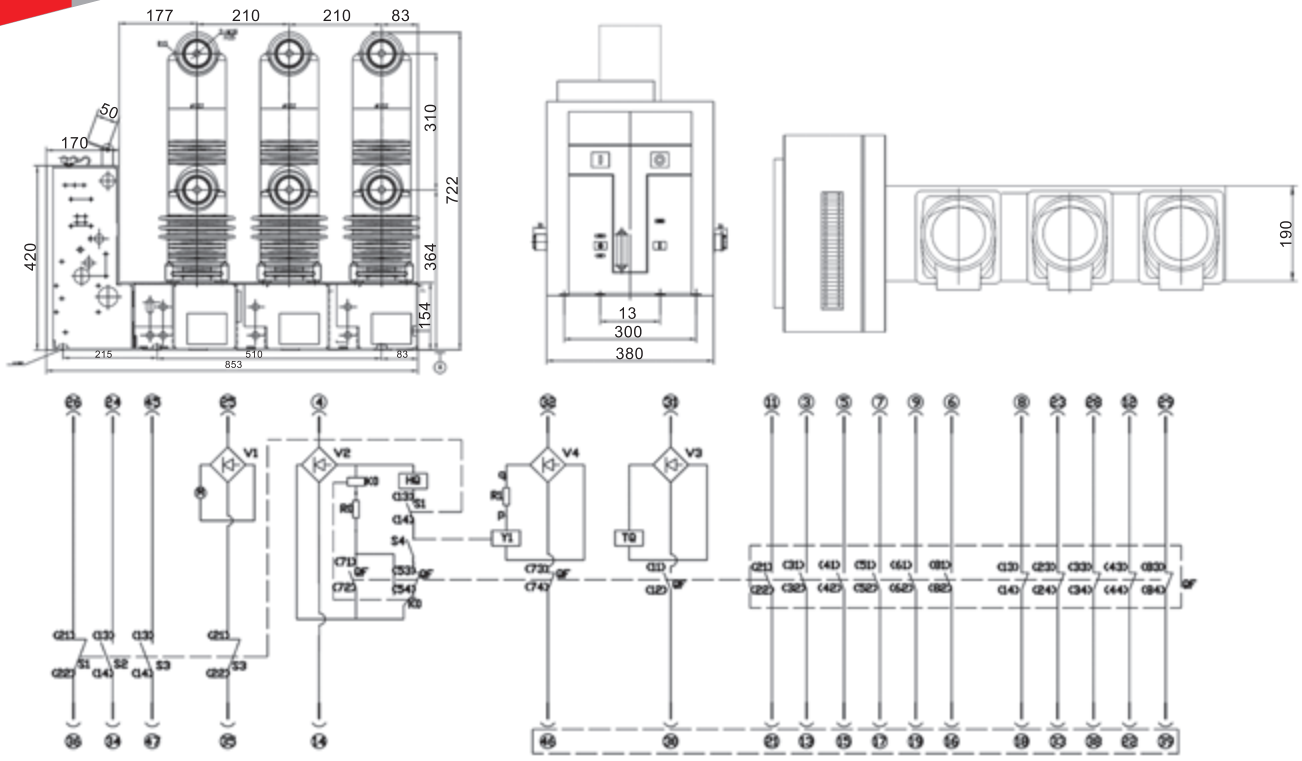

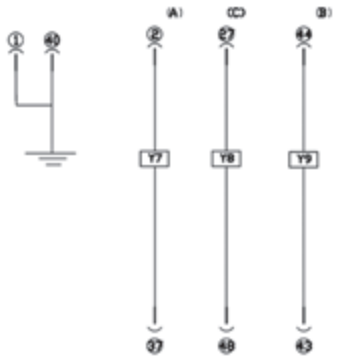

Technical Specifications (IEC 62271)

No.	Name		unit	Data	
1	Rated voltage		KV	24	
2	Rated insulation level	Power frequency withstand voltage		65	
		Rated lightning impulse withstand voltage		125	
3	Contact opening distance		mm	12±1	
4	Overtravel			3±0.5	
5	distance between phases			210±1	
6	Contact closing bounce time		mS	≤2	
7	Three-phase points, closing at different times			≤2	
8	Opening time			≤50	
9	Closing time			≤100	
10	Average opening speed （contact separation after 6mm）		m/S	0.9~1.3	
11	Average opening speed （Contact is closed before 6mm）			0.4~0.8	
12	Closing contact contact pressure		N	25KA	31.5KA
				2200±200	3200±200