


[FOUR POLE DISTRIBUTION BLOCKS]


This series distribution blocks are similar to two pole blocks, but have four independent poles. Between different poles there is a transparent partition plate to keep the connection safe. An extra neutral bar can be used to typical items.




Usage of Neutral Bar

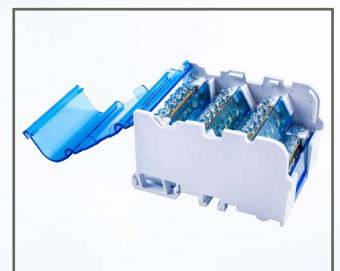


Open the Cover

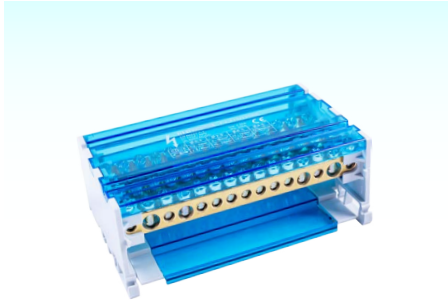

FJ-415/125BE

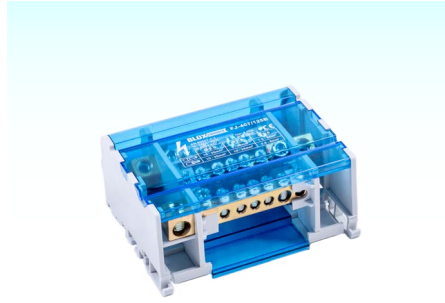

FJ-407/125B

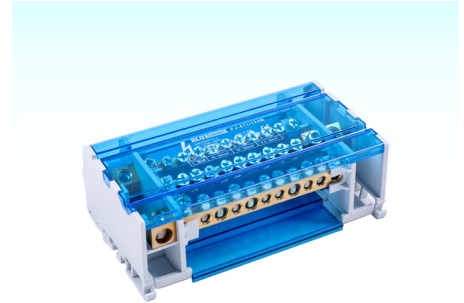

FJ-411/125B

CERTIFICATION	CB/CE/RoHS		
MATERIAL			
Size(mm)	90x130x50		
Screw	Zinc-Coated Steel		
Conductor	Brass		
Housing	PA66/V-0		
Cover	PC		
ELECTRICAL DATA			
Standards	IEC 60947-7-1		
Voltage(V)	500		
Current(A)	125		
Icw(KA)	4.5		
IPk(KA)	20		
WIRING DATA	A	B	C
Input	A	B	C
Connection Points	x2		
Torque(N·m)	2~3		
Diameter(mm)	8.5		
Rigid Wire(mm ²)	10~35		
Flexible Wire(mm ²)	10~16		
Output	A	B	C
Connection Points	x2	x11	
Torque(N·m)	2~3	2~3	
Diameter(mm)	7.5	5.3	
Rigid Wire(mm ²)	10~25	2.5~6	
Flexible Wire(mm ²)	6~16	1.5~6	
PACKING			
Pcs/Inner Box	1		
Pcs/Master Carton	40		

CERTIFICATION	CB/CE/RoHS		
MATERIAL			
Size(mm)	90x109x50		
Screw	Zinc-Coated Steel		
Conductor	Brass		
Housing	PA66/V-0		
Cover	PC		
ELECTRICAL DATA			
Standards	IEC 60947-7-1		
Voltage(V)	690		
Current(A)	125		
Icw(KA)	4.5		
IPk(KA)	20		
WIRING DATA	A	B	C
Input	A	B	C
Connection Points	x1		
Torque(N·m)	6~7		
Diameter(mm)	9.5		
Rigid Wire(mm ²)	10~35		
Flexible Wire(mm ²)	10~35		
Output	A	B	C
Connection Points	x5	x1	
Torque(N·m)	2~3	2~3	
Diameter(mm)	5.5	7.5	
Rigid Wire(mm ²)	2.5~6	10~25	
Flexible Wire(mm ²)	1.5~6	6~16	
PACKING			
Pcs/Inner Box	1		
Pcs/Master Carton	44		

CERTIFICATION	CB/CE/RoHS		
MATERIAL			
Size(mm)	90x147x50		
Screw	Zinc-Coated Steel		
Conductor	Brass		
Housing	PA66/V-0		
Cover	PC		
ELECTRICAL DATA			
Standards	IEC 60947-7-1		
Voltage(V)	690		
Current(A)	125		
Icw(KA)	4.5		
IPk(KA)	20		
WIRING DATA	A	B	C
Input	A	B	C
Connection Points	x1		
Torque(N·m)	6~7		
Diameter(mm)	9.5		
Rigid Wire(mm ²)	10~35		
Flexible Wire(mm ²)	10~35		
Output	A	B	C
Connection Points	x7	x3	
Torque(N·m)	2~3	2~3	
Diameter(mm)	5.5	7.5	
Rigid Wire(mm ²)	2.5~6	10~25	
Flexible Wire(mm ²)	1.5~6	6~16	
PACKING			
Pcs/Inner Box	1		
Pcs/Master Carton	30		

ACCESSORIES	
Neutral Bar	NB125A (See Page 20)