


[FOUR POLE DISTRIBUTION BLOCKS]

This series distribution blocks are similar to two pole blocks, but have four independent poles. Between different poles there is a transparent partition plate to keep the connection safe. An extra neutral bar can be used to typical items.




Usage of Neutral Bar



Open the Cover



FJ-418/80B

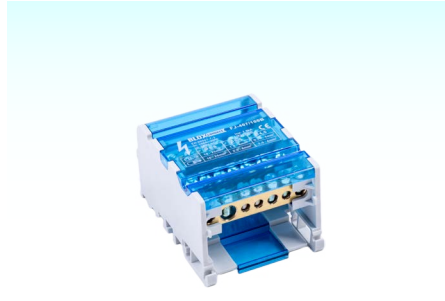

FJ-407/100B



FJ-411/100B

CERTIFICATION	CB/CE/RoHS		
MATERIAL			
Size(mm)	90x130x50		
Screw	Zinc-Coated Steel		
Conductor	Brass		
Housing	PA66/V-0		
Cover	PC		
ELECTRICAL DATA			
Standards	IEC 60947-7-1		
Voltage(V)	500		
Current(A)	80		
Icw(KA)	4.5		
IPk(KA)	20		
WIRING DATA	A	B	C
Input	A	B	C
Connection Points	x6		
Torque(N·m)	2		
Diameter(mm)	5.5		
Rigid Wire(mm ²)	2.5~6		
Flexible Wire(mm ²)	1.5~6		
Output	A	B	C
Connection Points	x12		
Torque(N·m)	1.2		
Diameter(mm)	4		
Rigid Wire(mm ²)	1.5~4		
Flexible Wire(mm ²)	0.75~4		
PACKING			
Pcs/Inner Box	1		
Pcs/Master Carton	40		

CERTIFICATION	CB/CE/RoHS		
MATERIAL			
Size(mm)	90x64x50		
Screw	Zinc-Coated Steel		
Conductor	Brass		
Housing	PA66/V-0		
Cover	PC		
ELECTRICAL DATA			
Standards	IEC 60947-7-1		
Voltage(V)	500		
Current(A)	100		
Icw(KA)	4.5		
IPk(KA)	20		
WIRING DATA	A	B	C
Input	A	B	C
Connection Points	x1		
Torque(N·m)	2~3		
Diameter(mm)	8.5		
Rigid Wire(mm ²)	10~25		
Flexible Wire(mm ²)	10~25		
Output	A	B	C
Connection Points	x3	x3	C
Torque(N·m)	1.2~1.5	2~3	
Diameter(mm)	4.5	5.5	
Rigid Wire(mm ²)	1.5~4	2.5~6	
Flexible Wire(mm ²)	0.75~4	1.5~6	
PACKING			
Pcs/Inner Box	1		
Pcs/Master Carton	74		

CERTIFICATION	CB/CE/RoHS		
MATERIAL			
Size(mm)	90x100x50		
Screw	Zinc-Coated Steel		
Conductor	Brass		
Housing	PA66/V-0		
Cover	PC		
ELECTRICAL DATA			
Standards	IEC 60947-7-1		
Voltage(V)	500		
Current(A)	100		
Icw(KA)	4.5		
IPk(KA)	20		
WIRING DATA	A	B	C
Input	A	B	C
Connection Points	x2		
Torque(N·m)	2~3		
Diameter(mm)	8.5		
Rigid Wire(mm ²)	10~25		
Flexible Wire(mm ²)	10~25		
Output	A	B	C
Connection Points	x4	x5	C
Torque(N·m)	1.2~1.5	2~3	
Diameter(mm)	4.5	5.5	
Rigid Wire(mm ²)	1.5~4	2.5~6	
Flexible Wire(mm ²)	0.75~4	1.5~6	
PACKING			
Pcs/Inner Box	1		
Pcs/Master Carton	50		